


COMPRESSION STRUTS: STEEL SECTION WITH L/R RATIO OF 200 MAXIMUM. ATTACH TO MAIN RUNNERS WITHIN 2" OF CROSS RUNNER W/ (2) - 3/16" ϕ POWDER-DRIVEN ANCHORS. COMPRESSION STRUT SHALL NOT REPLACE HANGER WIRE.

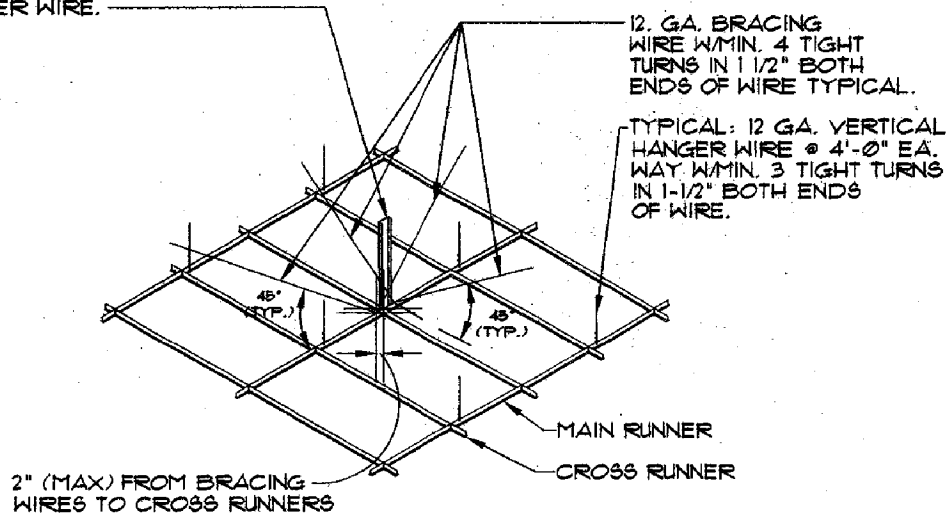

Suspended Clg. Grid Attachment